

# Quantum Force 3950

Security Gateway



Optimized for SD-WAN 

YOU DESERVE THE BEST SECURITY



## Top Security Effectiveness


Check Point has been ranked #1 for the third consecutive year, achieving a 99.9% malware block rate, 99.7% phishing prevention and 98% high and critical exploit prevention in the **Miercom Hybrid Mesh Firewall Benchmark 2025**

Named a Leader by Top Analyst Firms  
**Forrester Wave™ for Enterprise Firewalls 2024**

Check Point Recognized as a Leader and Outperformer for Enterprise Firewalls  
**GigaOm Radar for Enterprise Firewalls 2025**

Quantum Force 3950 branch office firewalls deliver up to 20 Gbps of firewall throughput and 5.5 Gbps of Threat Prevention throughput. It includes Check Point's full AI-powered security and real-time threat intelligence – in a space saving desktop form factor.

The 3950 is optimized for SD-WAN, high-speed connectivity to support the demanding requirements of today's hybrid mesh branch office networks.



## Quantum Force 3950 Performance Highlights

Firewall	Next Gen Firewall	Threat Prevention
20 Gbps	16.2 Gbps	5.5 Gbps

## Productivity Loss and Cyber Risks in Branch Offices

Today's branch offices are on the frontline, directly interacting with customers and the public. They directly connect the public cloud and internet which expose them to cyber threats. This often makes branch offices a weak link in enterprise network security.

As employees return to the office, they experience downgraded network performance compared to their high-speed home internet. Suddenly, the same bandwidth-hungry SaaS and enterprise apps become frustrating to use at the office due to lag, choppiness, and freeze ups.



## Frontline Defense for the Branch

### Secure, Blazing Fast SaaS Apps

The 3950 delivers 4x higher threat prevention throughput compared to previous models. This ensures secure, blazing fast network performance for SaaS productivity apps like Zoom, Teams, Salesforce, etc.

## Industry-Leading Security

- Next Generation Firewall
- Site-to-Site and Remote Access VPN
- Application and Web Filtering
- Intrusion Prevention
- Antivirus and Anti-Bot
- Advanced DNS Security
- Malware Prevention
- Sandboxing
- Zero-phishing (no agent required)
- HTTPS Inspection (Layer 1-7)
- DLP, IoT Security
- SD-WAN


## High Speed Connectivity & SD-WAN

The 3950 is optimized for SD-WAN has redundant power supply, 8 x 1GbE and 2 x 2.5 GbE and 2x 10GbE connections to support highspeed network in today's hybrid mesh branch networks.

## High Performance HTTPS Inspection

While commonly used for good, HTTPS web traffic can also hide illegal user activity and malicious traffic. Enterprises need the ability to inspect a broad range of encrypted TLS 1.3 and HTTPS channels while also excluding inspection of sensitive regulated industry traffic, such as Health Care and Financial. Check Point makes it easy to fine-tune HTTPS security using customizable dynamic security policies.

## Quantum Force 3950

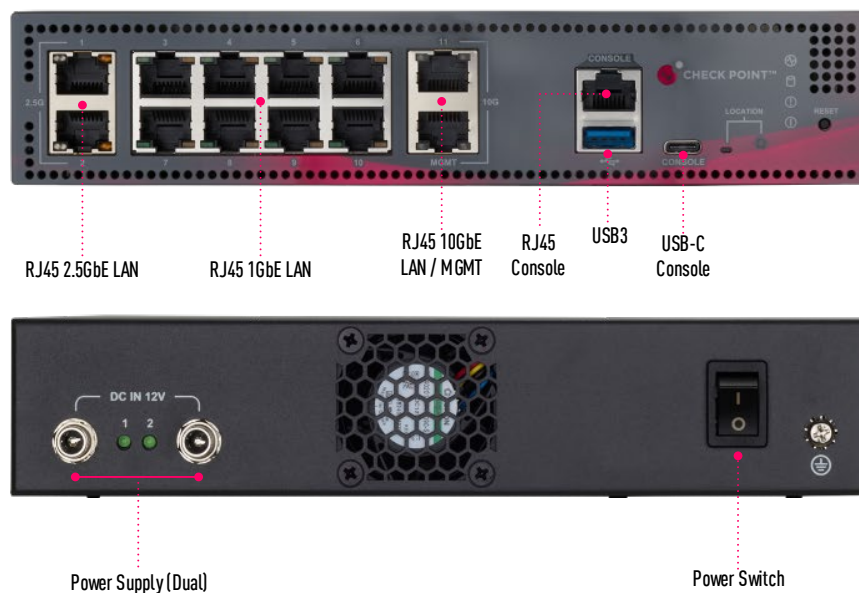

## Specifications

### Performance

#### Enterprise Test Conditions<sup>1</sup>

Threat Prevention <sup>2</sup> [Gbps]	5.5
Next Generation Firewall <sup>3</sup> [Gbps]	16.2
IPS Throughput [Gbps]	20
Firewall Throughput [Gbps]	20

#### RFC 3511, 2544, 2647, 1242 Performance (Lab)

Firewall 1518 bytes UDP [Gbps]	20
Firewall Latency (µSec)	13
VPN AES-GCM 1452B [Gbps]	17.5
Connections/Sec	130,000
Concurrent Connections (M)	7.2

#### TLS Inspection Performance

Threat Prevention <sup>1,2</sup> [Gbps]	1.75
Threat Prevention <sup>2</sup> web mix <sup>4</sup> [Gbps]	1.1
IPS web mix <sup>4</sup> [Gbps]	1.4

### Additional Features

#### Highlights

- 1 CPU, 8 Physical Cores
- 32 GB RAM
- 480 GB SSD NVME M.2
- 2x External AC-DC power adapters
- Desktop (Rack Mount installation - optional)

<sup>1</sup> Enterprise traffic profile measured with maximum memory.

<sup>2</sup> Includes Firewall, App Control, URLF, IPS, Anti Malware and SandBlast (Incl. DNS Security & Zero Phishing) with logging enabled.

<sup>3</sup> Includes Firewall, App Control and IPS with logging enabled.

<sup>4</sup> Web traffic mix is based on RFC 9411 (NetSecOpen) web traffic profile.

## Network

### Network Connectivity

- Optimized for SD-WAN, network efficiency and resilience
- Total physical and virtual (VLAN) interfaces per appliance: 1024/4096 (single gateway/with virtual systems)
- 802.3ad passive and active link aggregation
- Layer 2 (transparent) and Layer 3 (routing) mode

### High Availability

- Active/Active L2, Active/Passive L2 and L3
- Session failover for routing change, device and link failure
- ClusterXL or VRRP

### IPv6

- NAT66, NAT64, NAT46
- CoreXL, SecureXL, HA with VRRPv3

### Unicast and Multicast Routing (see SK98226)

- OSPFv2 and v3, BGP, RIP
- Static routes, Multicast routes
- Policy-based routing
- PIM-SM, PIM-SSM, PIM-DM, IGMP v2, and v3

## Physical

### Power Requirements

- Dual External AC-DC Adaptors
- Single AC-DC Adaptor ratings: 60W
- Power input: 100 to 240VAC (50-60Hz)
- Power consumption avg/max: 46W/54W
- Maximum thermal output avg/max: 160.73 BTU/hr /191.07 BTU/hr

### Dimensions

- Enclosure: Desktop
- Dimensions (WxDxH): 8.27 x 8.26 x 1.67 in. (210 x 209.9 x 42.5mm)
- Weight: 2.17 lbs / 0.988 kg
- Box Weight: 4.52 lbs / 2.052 kg
- Box Dimensions: 10.43 in(L) x 9.45 in(W) x 4.33 in(H)  
26.5 cm(L) x 24 cm(W) x 11 cm(H)

### Environmental Conditions

- Operating: 32°F - 104°F 0°C - 40°C, humidity 5% to 95%
- Storage: -4°F - 158°F -20° - 70°C, humidity 5% to 95%
- MTBF: 234086 hrs @ 25°C / 138550 hrs @ 40°C
- Noise Level: 34.3dB

### Certifications

- Safety: CB IEC 62368-1, CE LVD EN62368-1, UL62368-1, AS/NZS 62368.1
- Emissions: CE, FCC IC, VCCI, AS/NZS ACMA
- Environmental: ROHS, REACH, WEEE, ISO14001

Hardware		QF 3950
RJ-45 (1 GbE)		8x 1GbE
RJ-45 (2.5 GbE)		2x 2.5GbE
RJ-45 (10 GbE)		2x 10GbE
Console		USB Type C & RJ-45
USB		1x USB 3.0 Type A
Memory		32 GB
Storage		480 GB SSD NVME M.2
PSU		Dual (External)
Dimensions		
Dimensions (W x D x H)		8.27 x 8.26 x 1.67 in. (210 x 209.9 x 42.5mm)
Weight		4.524 lbs / 2.052 kg
Environment		
Operating / Storage		32°F - 104°F 0°C - 40°C / -4°F - 158°F -20° - 70°C
MTBF		234086 hrs @ 25°C / 138550 hrs @ 40°C
Power Requirements		
AC Input		100 - 240VAC (50-60Hz)
Power Supply Rating		12V/5A 60W power adapter
Power Consumption Max.		54W
Heat Dissipation Max. (BTU/hr.)		192
Noise Level @ 25oc (dB)		34.3
Certifications		
Safety		CB IEC 62368-1, CE LVD EN62368-1, UL62368-1, ASNZS 62368.1
Emissions		CE, FCC IC, VCCI, ASNZS ACMA
Environmental		ROHS, REACH, WEEE, ISO14001

## VIRTUAL SYSTEM

	Firewall VS	Firewall + IPS VS	Next Gen. Threat Prevention VS
# of VS's	28	14	7

## ORDERING QUANTUM FORCE 3950 SECURITY GATEWAY

The 3950 includes 1x1GbE copper GbE management port plus an additional 8x 1GbE ports for synchronization when using the 3950 in a cluster. With the 8 network I/O ports, to meet your networking requirements. The 2x10GbE Ports enables firewall traffic acceleration at line-rate.

Security Appliance	SKU
3950 configuration: 1x1GbE RJ45 management port & 1x1GbE RJ45 sync port, on-board 8x1GbE RJ45 ports, 2x2.5GbE RJ45 ports, 2x10GbE RJ45 ports, 32 GB RAM, 1x 480 GB SSD SATA, 1x AC external PSUs, SandBlast (SNBT) Security Subscription Package for 1 Year	CPAP-SG3950-SNBT
Next Generation Threat Prevention & SandBlast package for 1 year for Quantum Force 3950 appliance	CPSB-SNBT-3950-1Y
Next Generation Threat Prevention package for 1 year for Quantum Force 3950 appliance	CPSB-NGTP-3950-1Y
Next Generation Firewall Package for 1 year for Quantum Force 3950 appliance	CPSB-NGFW-3950-1Y
Quantum IoT Network Protection for 1 year for Quantum Force 3950 appliances	CPSB-IOTP-3950-1Y
Quantum SD-WAN subscription for 1 year for Quantum Force 3950 appliances	CPSB-SDWAN-3950-1Y
Data Loss Prevention (DLP) blade for 1 year for Quantum Force 3950 appliances	CPSB-DLP-3950-1Y

Accessories	SKU
Replacement Power Supply for 2550W5G,2570, 2570W, 2590, 2590W, 2680, 3920 and 3950 models	CPAC-2550W5G/2590/3920/3950-PSU
Rack Mount shelf for Single/Dual 2500/ 3920/ 3950 desktop appliances. The mount does not support Wi-Fi models	CPAC-2500/3900-RM-DUAL
Rack Mount ears for 2570, 2590, 2680, 3920, 3950 models	CPAC-2590/2680/3900-RM-EARS

SUBSCRIPTION SERVICES	NGFW	NGTP	SNBT (Sandblast)
Application Control	✓	✓	✓
IPS	✓	✓	✓
URL Filtering		✓	✓
Anti-Bot		✓	✓
Anti-Virus		✓	✓
Anti-Spam		✓	✓
DNS Security		✓	✓
SandBlast Threat Emulation (sandboxing)			✓
SandBlast Threat Extraction (CDR)			✓
Zero Phishing			✓
DLP	Optional	Optional	Optional
IoT	Optional	Optional	Optional
SD-WAN	Optional	Optional	Optional

#### Worldwide Headquarters

5 Shlomo Kaplan Street, Tel Aviv 6789159, Israel | Tel: +972-3-753-4599

#### U.S. Headquarters

100 Oracle Parkway, Suite 800 Redwood City, CA 94065 | Tel: 1-800-429-4391

[www.checkpoint.com](http://www.checkpoint.com)

© 2025 Check Point Software Technologies Ltd. All rights reserved.

QF3950030625A